


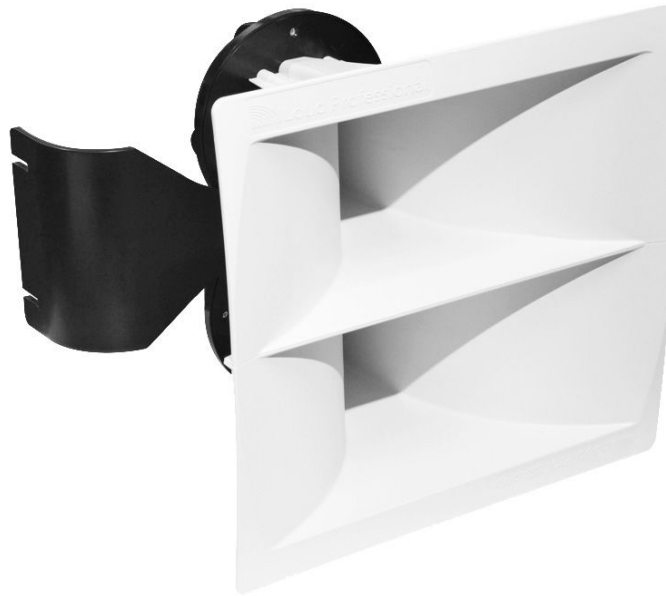

EMD

Technical Specifications

Frequency Range (+/-3 dB)	350 Hz - 1.65 kHz
Nominal Directivity (-6 dB) H x V	90° x 10°
Maximum Peak SPL (MF)	141 dB
Components MF	2 x 6.5in. Neodymium cone driver
Nominal Impedance MF	8 Ω
Power Handling (AES / Peak) MF	360 / 1.440 W
Rigging	LayerEMD™ rigging system
Connections	1 x SpeakON™ NL4
Enclosure Construction	ABS
Finish	Acrylic two-component finish
Protection Grille	N.A.
Height Front (mm / in.)	450 / 17.71
Height Back (mm / in.)	450 / 17.71
Width Front (mm / in.)	472 / 18.58
Width Back (mm / in.)	346 / 13.62
Depth (mm / in.)	371 / 14.61
Weight (kg / lbs)	8 / 17.63
Supported Processing	Armonia Pro Audio Suite